Heathrow Scientific
design | function | innovation

Vortexer

Variable Speed Vortexing Unit

Multi-purpose, maximum convenience

5 Year Warranty

Innovative Design

- One mixing head does it all with this sleek, modern and compact designed vortex mixer
- Hold slot configurations for multiple sizes of tubes, vessels and assay plates
- Center pad for quick hand-held mixing

Easy to Use

- Control switch with three operation selections (intermittent, off, continuous)
- Variable Speed Rotary Dial provides pre-set speed control selection during shaking mode

Durable Construction

- ABS material resist most commonly used chemicals and is easy to clean
- Stable elastomer feet dampen vibration and prevent movement during operation

Specifications	
Speed Range:	To 3000 rpm, (shaking to vortexing)
Orbit:	3.7 mm
Control:	3 position slider — (top) intermittent, (middle) off, (bottom) continuous
Weight:	8.66 Lb/3.93 Kg
Dimensions:	171w x 190d x 197h mm (6.67w x 7.41d x 7.68h in.) (with mixing head in place)
Five-year warranty	

6 Different Sizes of Tubes
Including standard assay plate

Center pad area for
hand held mixing

Assay plate x 1
(to be used with retention cords)

50 mL conical tubes x 2
(horizontally mounted)

15 mL conical tubes x 2
(horizontally mounted)

5 mL tubes x 2
(horizontally mounted in the
same retention space as 15 mL)

1.5/2 mL microfuge tubes x 4
(vertically mounted)

0.5 mL microfuge tubes x 6
(vertically mounted)

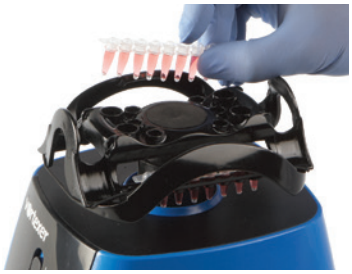

0.2 mL microfuge tubes
(strip tubes) x 24
(vertically mounted)

Item No.	Power Supply	
HS120209	110V – 120V, 50-60 Hz, 55 Watts, US/NA	
HS120212	220V – 240V, 50-60 Hz, 44 Watts, CE	
HS120214	220V – 240V, 50-60 Hz, 44 Watts, UK	

Heathrow Scientific
design | function | innovation

Heathrow Scientific, LLC I 440 N Fairway Drive, Vernon Hills IL 60061 USA
Tel.: +1-800-741-4597 I E-mail: info@heatsci.com I www.heathrowscientific.com